

# Product Catalogue

## SAW COMPONENTS Dresden GmbH

Frieder Birkholz  
Manfred-von-Ardenne-Ring 7  
01099 Dresden  
Germany

[www.sawcomponents.de](http://www.sawcomponents.de)

E-Mail: [support@sawcomponents.de](mailto:support@sawcomponents.de)

Tel.: +49 351 88725-10

All pictures / images are, unless stated otherwise,  
the copyright and are privately owned by Frieder Birkholz.

## Content

<b>Product Catalogue</b> .....	<b>1</b>
<b>Content</b> .....	<b>2</b>
<b>Introduction</b> .....	<b>4</b>
<b>System Components</b> .....	<b>5</b>
<b>Select your Reader</b> .....	<b>6</b>
<b>Legend</b> .....	<b>7</b>
<b>Reader</b> .....	<b>8</b>
SAW INDUSTRY.....	9
SAW ECO <sup>+</sup> .....	11
<b>Software</b> .....	<b>12</b>
SAW IDENT .....	13
SAW TEMP .....	14
<b>SAW Transponders</b> .....	<b>15</b>
High Temperature Transponder.....	16
Ultra High Temperature Transponder.....	17
Hot Surface Transponder .....	18
Medium Temperature Transponder .....	19
Universal Transponder .....	20
Neckband Transponder .....	21
Cow Earmark Transponder.....	22
SAW Access Transponders .....	23
<b>Sensor Modules</b> .....	<b>24</b>
<b>Overview: Temperature Sensors</b> .....	<b>25</b>
Your Custom Sensor .....	27
SAW Cable Temperature Sensor .....	28
Wireless Temperature Spit.....	29
Universal Temperature Sensor Module .....	31
Nail Sensor.....	32
Flexible Temperature Sensor .....	33
M4 Miniature Temperature Sensor Screw.....	34
Short Range Temperature Sensor for Rotating Applications.....	35
<b>Antennas</b> .....	<b>36</b>
Universal Antenna 8 dBi .....	37
Universal Antenna 5 dBi .....	38
Universal Antenna 16 / 20 dBi.....	39
High Temperature Slot Antenna .....	40
High Temperature Horn Antenna .....	41
Strip Line Antenna .....	42
Antenna Accessories .....	43
<b>Sensor Elements</b> .....	<b>44</b>
<b>Overview: Sensor Elements</b> .....	<b>45</b>
SS43xFB2 .....	46

SS43xFB3 .....	47
SS43xFB4 .....	48
SS43xFO2 .....	49
SS43xFO4 .....	50
SS24xxBB2 .....	51
SS24xxBB3 .....	52
SS24xxBO3 .....	53

## Introduction

SAW Sensor Systems provide a sophisticated sensing technology for challenging requirements. The robust and reliable sensors are fit for harshest environments and high temperatures in industrial applications.

The service and support for all industrial components is guaranteed for at least 5 years. Combining high precision and long lifetime with passive and wireless sensing, SAW Sensor Systems enable continuous process control and efficiency.

### Systems



- temperature sensing
- - 180°C - +350°C
- accuracy +/- 1K
- wireless
- range up to 10 m
- passive
- aging: 0.3K / 1000h
- lifetime: min. 1000h
- at Tmax



- RFID / identification
- up to 700°C
- up to 64 bit code
- wireless
- up to 15 m
- passive
- lifetime: min. 1000h
- at Tmax

### Frequency Band

**ISM 2.4** ISM Band 2.4 GHz  
(2400 – 2483 MHz)

**ISM 433** ISM Band 433 MHz  
(433,05 – 434,79 MHz)


### Operating Temperature



Maximum operating temperature of a device is displayed by this symbol in each datasheet.

## System Components

Every SAW System contains of these basic elements:

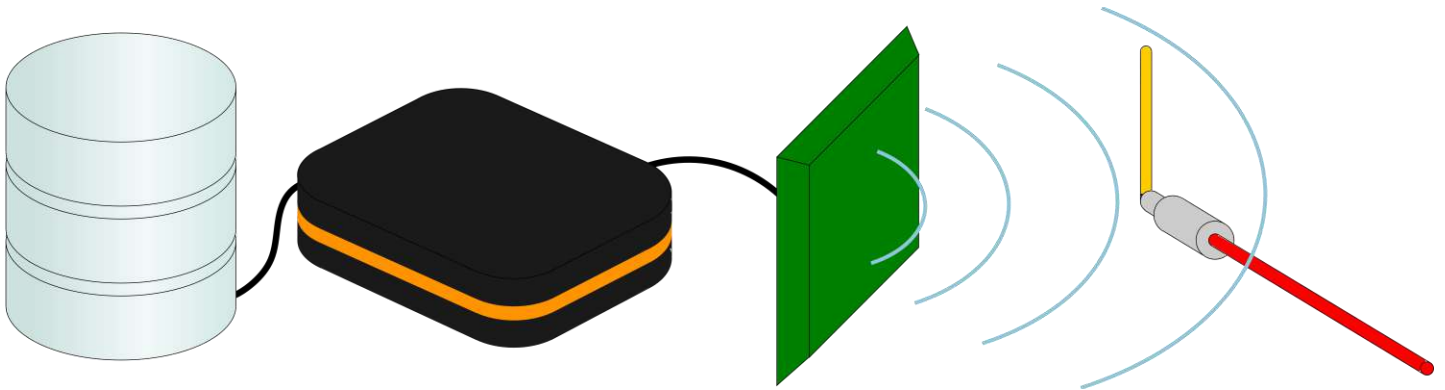

Customer IT	SAW Reader	Reading Antenna	Sensor Antenna	Sensor Module
<p>SAW Systems can be connected to a broad variety of customer systems.</p> <ul style="list-style-type: none"> <li>• SPS</li> <li>• Server</li> <li>• Computer</li> <li>• ...</li> </ul>	<p>SAW Reader interrogate the wireless sensors and transponders. They provide the measurement results at the interface.</p> <p>Interfaces:</p> <ul style="list-style-type: none"> <li>• Ethernet</li> <li>• WIFI</li> <li>• 0-10 V</li> <li>• 4-20 mA</li> <li>• Webserver</li> </ul>	<p>The Reading Antenna is connected to the reading unit by antenna cable. It is the stationary part of the wireless interrogation.</p> <p>Antennas for:</p> <ul style="list-style-type: none"> <li>• high temperature</li> <li>• rotating applications</li> <li>• long range</li> <li>• short range</li> </ul>	<p>The Sensor Antenna is part of the sensor module. It can be inside of the sensor module or a separate position and connected by antenna cable.</p> <ul style="list-style-type: none"> <li>• Separate Antenna</li> <li>• Integrated Antenna</li> </ul>	<p>The sensor module includes the SAW sensor and, in case of integrated antennas, the sensor antenna. It is available as standard part and custom part for your application.</p> <ul style="list-style-type: none"> <li>• SAW Temperature Sensor</li> <li>• SAW Strain Sensor</li> <li>• SAW Transponder</li> </ul>



Please see the specific section in the catalogue to find the device for your application.

Please contact us for custom sensors, antennas and readers.

[www.sawcomponents.de](http://www.sawcomponents.de)

## Select your Reader

Below please find a brief overview about the major features of all SAW readers. The detailed datasheets and descriptions are listed on the following pages.

	ECO <sup>+</sup>	INDUSTRY	HYBRID
 <b>SAW IDENT</b>	●	●	●
 <b>SAW TEMP</b>	○	●	○
<b># of Antennas</b>	2	2 / 4	4
<b>Read Rate (Hz)</b>	10	10	75
<b>Ethernet</b>	●	●	●
<b>Analog Output</b>	-	●	●
<b>Protection Class</b>	IP 40	IP 65	IP 20

### Legend:

- Feature integrated in reader (stand alone, no PC necessary)
- Feature available on PC software (PC necessary)
- Feature not available

## Legend

Dimensions

all dimensions are given in the following format, unless otherwise stated:

Width x Length x Height



# Reader



# SAW INDUSTRY

The SAW Reader



ISM  
2.4



- Order Number:** INDUSxxxxx
- Antenna:** 2x external (SMA female)  
optional: 4x external (N female)
- Frequency Band:** 2400 – 2483 MHz (ISM)
- Interface:** LAN  
Trigger (in/out)  
WIFI (5 GHz)
- Sampling Rate:** up to 10 Hz
- Frequency Accuracy:** ± 3 ppm
- CPU Speed:** Dual Core 1.60 GHz
- RAM:** 2GB RAM
- Hard Disk:** 32 GB SSD
- Dimensions:** 198 mm x 127 mm x 47 mm
- Weight:** 770g (900g with optional interfaces)
- Power:** 100-240 V AC power supply  
15 V DC, 4.3 A (4.8 W)
- Protection Class:** IP65
- Assembly:** stand alone  
mounting plate (e.g. cap rail)
- Operating Temp.:** 0°C – 40°C
- SAW Systems:** SAW IDENT  
SAW TEMP  
SAW STRAIN



---

## Options

# SAW INDUSTRY

Useful Add-Ons for the industrial application

---

### 4 Antenna Ports

Extent the number of antennas for your reader to 4 robust N-connectors.

The 2x SMA connectors get replaced by an additional stack with 4x N connectors.

N connectors provide best robustness for harsh industrial environments.



## SAW ECO<sup>+</sup>

The SAW IDENT Reader



ISM  
2.4



<b>Order Number:</b>	ECO0006
<b>Antenna:</b>	2x external (N female)
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Interface:</b>	LAN
<b>Sampling Rate:</b>	up to 10 Hz
<b>Frequency Accuracy:</b>	± 3 ppm
<b>Dimensions:</b>	200 mm x 127 mm x 45 mm
<b>Weight:</b>	550g
<b>Power:</b>	8-36V, 1A, typ. 24V DC
<b>Protection Class:</b>	IP40
<b>Assembly:</b>	stand alone, mounting angle (e.g. cap rail)
<b>Operating Temp.:</b>	0°C - 40°C
<b>SAW Systems:</b>	SAW IDENT



### Optional Features:

SAW TEMP available on PC:

- Reader used as PC-connected reader (not stand alone)
- with SAW Wireless Systems software installed on PC

# Software



## SAW IDENT

Module for the RFID with SAW

### Features

- reader control and setup
- display transponder code
- logging of the identification data
- output to interfaces
- acoustic reading signal

### Stand Alone - Reader

- reader setup via SAW IDENT Module
- remote control of reader via Ethernet (TCP/IP protocol) by customer software
- datagramm

### PC connected Reader: system requirements

- operating system: min. Windows XP / 7
- CPU: min. Dual-Core 1.60GHz
- RAM: 2 GB
- Hard Disk: 1 GB





## SAW TEMP

Module for the Wireless Temperature Measurement

### Features


- reader control and setup
- graphic user interface
  - analoge instruments
  - flexible time domain-presentation
- logging of measurement values
- output to interfaces

### For Stand Alone - Reader

- reader setup via SAW TEMP Module
- remote control of reader via Ethernet (TCP/IP protocol) by customer software
- datagramm

### PC connected Reader: system requirements

- operating system: Windows XP / 7
- CPU: min. Dual-Core 1.60GHz
- RAM: 2 GB
- Hard Disk: 1 GB

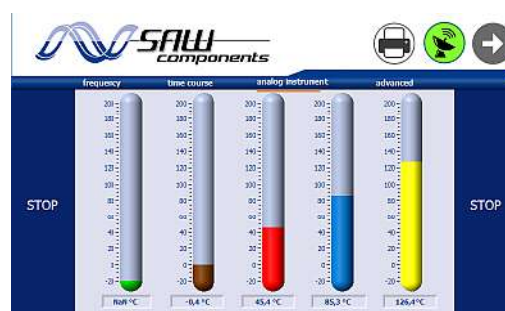



# SAW Transponders

# High Temperature Transponder

STHT2450B

°C  
200  
ISM  
2.4

<b>Order Number:</b>	STHT2450B
<b>Code:</b>	SAW Code 16 Bit
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	9 dBi
<b>Polarity:</b>	linear
<b>Use on Metal:</b>	yes
<b>Operating Temp.:</b>	-40°C - 200°C
<b>Dimensions:</b>	96 x 65 x 23 mm
<b>Material:</b>	Stainless Steel
<b>Protection:</b>	IP 67
<b>Weight:</b>	157g
<b>Assembly:</b>	screwing (M6) welding



(Image may differ from original product)

The High Temperature Transponders STHT2450B is a full-passive state-of-the-art transponder for logistic applications in hot environments like the steel industry or painting lines. The robust steel design provides a high reading range and a great resistivity against dust and mechanical influences.

### Features and Applications:

- container and material tracking in high temperature environments
- ladle tracking
- painting lines



# Ultra High Temperature Transponder

°C  
350

STUHT2450A

ISM  
2.4

<b>Order Number:</b>	STUHT2450A
<b>Code:</b>	SAW Code 16 Bit
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	9 dBi
<b>Polarity:</b>	linear
<b>Use on Metal:</b>	yes
<b>Operating Temp.:</b>	-40°C - +350°C
<b>Dimensions:</b>	96 x 65 x 23 mm
<b>Material:</b>	Stainless Steel
<b>Protection:</b>	IP 67
<b>Weight:</b>	157g
<b>Assembly:</b>	screwing (M6) welding




The High Temperature Transponders STUHT2450A is a full-passive state-of-the-art transponders for logistic applications in very hot environments like the steel industry or painting lines. The robust steel design provides a high reading range and a great resistivity against dust and mechanical influences.


### Features and Applications:

- container and material tracking in high temperature environments
- ladle tracking
- painting lines

## Hot Surface Transponder

STUHT2450-S

 °C  
**350**

 °C  
**700**

**ISM**  
**2.4**

**Order Number:** STUHT2450-S  
**Code:** SAW Code 16 Bit  
**Frequency Band:** 2400 – 2483 MHz (ISM)  
**Antenna Gain:** 9 dBi  
**Polarity:** linear  
**Use on Metal:** yes



**Operating Temp.:**  
 at Transponder -40°C - +350°C  
 Object Surface -40°C - +700°C

**Dimensions:** 110 x 72 x 36 mm  
**Material:** Stainless Steel  
 Calcium Silicate

**Protection:** IP 67  
**Weight:** 215g

**Assembly:** welding

### Application Notice:

This transponder is capable to be used on hot surfaces under the condition that the surrounding air temperature provides sufficient cooling that the chip-location on the transponder remains at <350°C. **This transponder is NOT suited for use in environmental (air) temperatures above 350°C!**

### Features and Applications:

- tracking of containers and material with particularly hot surfaces
- tracking of Beam Blanks, Billets or Castings

# Medium Temperature Transponder

STMT2450HF1APTPL01

°C  
165  
ISM  
2.4

**Order Number:** STMT2450HF1APTPL01

**Code:** SAW Code 16 Bit

**Frequency Band:** 2400 – 2483 MHz (ISM)

**Antenna Gain:** 6 dBi

**Polarity:** RCP

**Use on Metal:** yes

**Operating Temp.:** -40°C - +165°C

**Dimensions:** 26 mm diameter x  
8 mm height

**Material:** PX 234HT

**Protection:** IP 67

**Weight:** 9.3g

**Assembly:** gluing



## Features and Applications:

- logistics
- asset tracking

This transponder can be mounted flush to a metal surface.

## Universal Transponder

STUT2450

°C  
120  
ISM  
2.4

<b>Order Number:</b>	STUT2450
<b>Code:</b>	SAW Code 16 Bit SAW Code 20 Bit
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	4 dBi
<b>Polarity:</b>	linear
<b>Use on Metal:</b>	yes
<b>Operating Temp.:</b>	
Type STUT2450	-40°C - +120°C
<b>Dimensions:</b>	49.5 mm x 36.5 mm x 13 mm
<b>Material:</b>	PX 223HT
<b>Protection:</b>	IP 67
<b>Weight:</b>	30g
<b>Assembly:</b>	gluing,
optional:	magnetic assembling mounting plate



### Features and Applications:

- logistics
- asset tracking

The STUT2450 is the standard SAW Transponder for logistic application with a robust plastic packaging.

## Neckband Transponder

STCNT2450 (agriculture)

°C  
85

ISM  
2.4

<b>Order Number:</b>	STCNT2450
<b>Code:</b>	SAW Code 16 Bit SAW Code 20 Bit
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	5 dBi
<b>Polarity:</b>	linear
<b>Use on Metal:</b>	yes
<b>Operating Temp.:</b>	-40°C - +85°C
<b>Dimensions:</b>	59 mm x 52 mm x 27 mm
<b>Material:</b>	PX 223HT
<b>Protection:</b>	IP 67
<b>Weight:</b>	49g



**Assembly:** on animal neckband

**Features and Applications:**

- compatible with standard animal neckbands
- animal identification and location in the agriculture

The STCNT2450 is the special version of the STUT2450 for use on neckbands in the agriculture.

## Cow Earmark Transponder

STCET2450

°C  
85

ISM  
2.4

<b>Order Number:</b>	STCET2450
<b>Code:</b>	SAW Code 16 Bit SAW Code 20 Bit SAW Code 50 Bit
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	0 dBi
<b>Polarity:</b>	circular
<b>Use on Metal:</b>	no
<b>Operating Temp.:</b>	-40°C - +85°C
<b>Dimensions:</b>	∅ 29.5 mm x H 17 mm
<b>Material:</b>	TPU
<b>Protection:</b>	IP 67
<b>Weight:</b>	6.5 g
<b>Assembly:</b>	with standard earmark applicator



The STCET2450 is a special SAW Transponder for the use in agriculture. It uses a standard earmark packaging and can be applied with all typical earmark applicators. The Transponder provides the great reading range (ca. 2-3 m) of the passive SAW IDENT technology for the agriculture, improving reading distance and reliability on gates, stations and during manual selection.

### Features and Applications:

- 10x reading distance compared to standard LF/HF transponders
- fully passive (no battery)
- fully compatible to usual earmark applicators
- for animal identification according to international animal identification laws

## SAW Access Transponders



STT2450 (Token)  
STC2450 (Card)

ISM  
2.4

### Order Number:

Token STT2450  
Card STC2450

### Code:

SAW Code 16 Bit  
SAW Code 20 Bit

**Frequency Band:** 2400 – 2483 MHz (ISM)

**Antenna Gain:** 0 dBi

**Polarity:** circular

**Use on Metal:** no

**Operating Temp.:** -40°C - +85°C

### Dimensions:

STT2450 32 mm x 57 mm x 4 mm  
STC2450 86 mm x 54 mm x 2.5 mm

### Material:

STT2450 ABS top, polyamide casing

STC2450

**Protection:** IP 54

### Weight:

STT2450  
STC2450 8.5 g



The SAW Access Transponders allow contact-free access control using passive SAW IDENT technology. The reading distance is significantly larger than with LF/HF transponders, combining the range of infrared door openers with the access control function of RFID.

### Features and Applications:

- 10x reading distance compared to standard LF/HF transponders
- fully passive (no battery)
- for hands-free access



# Sensor Modules



## Overview: Temperature Sensors

SAW COMPONENTS provides a broad range of SAW Sensor Elements. Choose the element which meets the needs of your application.

### Temperature Range

The temperature range of a sensor or sensor module is indicated by the number in the product name:

Type:	Tmax:
<b>FB2</b>	200°C
<b>FB3</b>	275°C
<b>FB4</b>	350°C

### Package

The package of the sensor is indicated by the last letter in the product name:



**FB2**

SMD 3x3 mm



**FO2**

TO25 2.5 mm



**FM4**

TO39 10 mm


### Available Sensor Types: Temperature Sensors

Type	Band	Measurement R.	Package	Number of FQ
<b>SS43xFB2</b>	ISM 433 MHz	-40°C – 200°C	SMD 3x3 mm <sup>2</sup>	4
<b>SS43xFB3</b>	ISM 433 MHz	-40°C – 275°C	SMD 3x3 mm <sup>2</sup>	4
<b>SS43xFB4</b>	ISM 433 MHz	-40°C – 350°C	SMD 3x3 mm <sup>2</sup>	4
<b>SS43xFO2</b>	ISM 433 MHz	-40°C – 200°C	TO25 2.5mm	3
<b>SS43xFO4</b>	ISM 433 MHz	-40°C – 350°C	TO25 2.5mm	3
<b>SS24xxBB2</b>	ISM 2.4 GHz	-40°C – 200°C	SMD 3x3 mm <sup>2</sup>	18
<b>SS24xxBB3</b>	ISM 2.4 GHz	-40°C – 275°C	SMD 3x3 mm <sup>2</sup>	18
<b>SS2xxxAB3</b>	ISM 2.4 GHz	0°C – 275°C	SMD 3x3 mm <sup>2</sup>	20
<b>SS24xxBO2</b>	ISM 2.4 GHz	-40°C – 200°C	TO25 2.5mm	19

### Number of Sensors

SAW Sensors based on the **resonator principle** shift their centre frequency ( $f_c$ ) over the temperature. The frequency is measured by the reader and the resulting temperature is calculated from this frequency.

It is possible to use several sensors simultaneously in the ISM band. The sensors are distinguished and identified by the nominal frequency [see “nominal frequencies” in the sensor section]. To avoid an overlap of sensors, which would result in the loss of assignability of the sensor data, there is a frequency gap between each sensor:

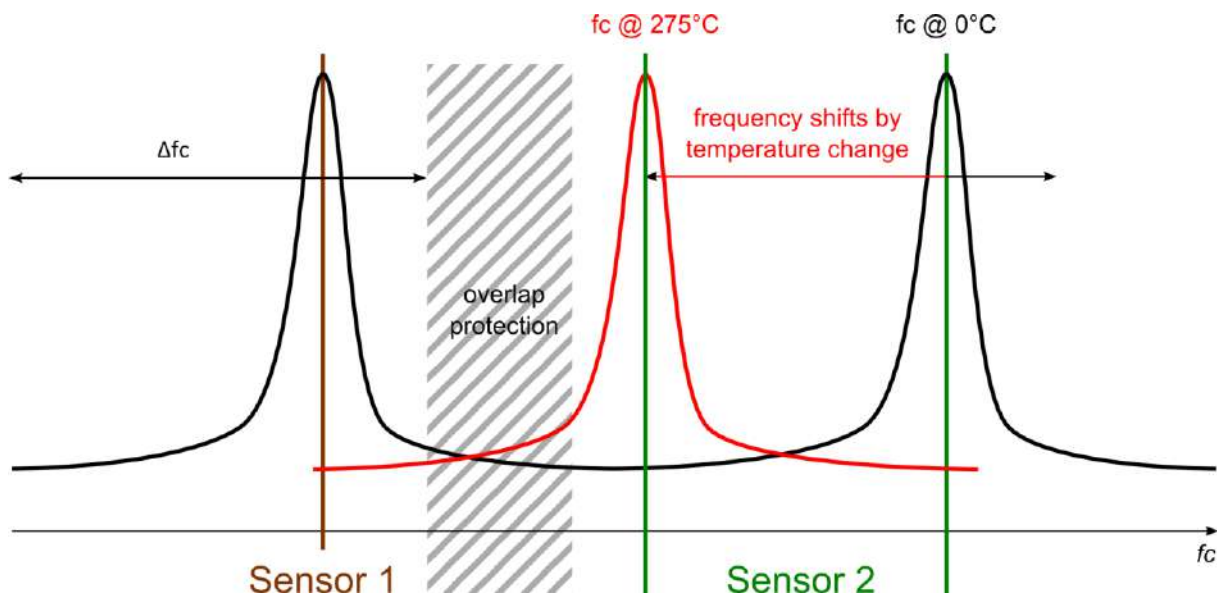

The number of sensors that can be used simultaneously without leaving the restrictions of the ISM bands depend two factors: **Measuring Range (MR)** and **Temperature Difference between the Measuring Points ( $\Delta T$ )**. See the following table for typical values in the ISM Band 2.4 GHz (2400 MHz – 2483 MHz):

$\Delta T$	Measurement Range				
	0 – 50°C	0 – 100°C	0 – 200°C	-40 – 200°C	-40 – 275°C
10 K	20	18	12	12	7
50 K	12	10	6	5	3
100 K		7	4	4	2
200 K			3	3	2

**Note:** Above description only applies for SAW sensors using resonator principle. For delay line sensors, the information does not apply.

## Your Custom Sensor

°C  
85

°C  
200

°C  
275

°C  
350


ISM  
433

ISM  
2.4

Your machine needs a measurement in a spot that is difficult to access? The moving part is cramped and only small space available?

We support you with the custom-made sensor that perfectly fits to your application in size, performance and cost. Choose from the broad variety of sensor elements, antennas and casings.

Contact us via  
[www.sawcomponents.com](http://www.sawcomponents.com)

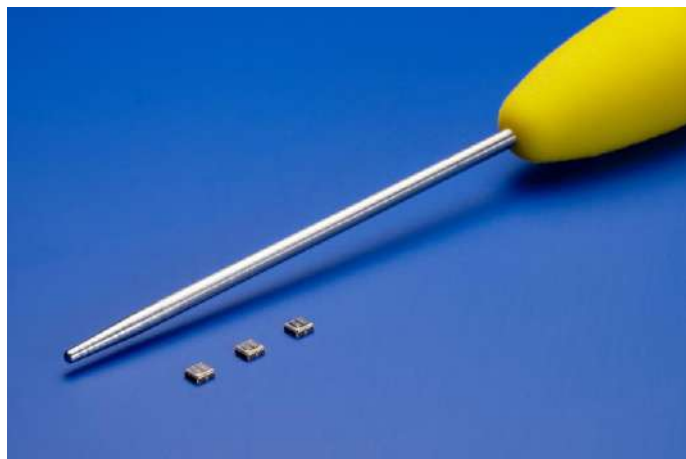

## SAW Cable Temperature Sensor

 °C  
**200**
 °C  
**275**  
**ISM**  
**2.4**

### Order Number:

Type 200°C                    SCS24xxBB20SM  
 Type 275°C                    SCS24xxBB30SM

### Sensor Type:

Resonator

### Frequency Band:

2400 – 2483 MHz (ISM)

### Antenna:

SMA-, N-connector or antenna (on request)

### Operating Temp.:

Type SCS24XXBB2

at Sensor:                    -40°C – 200°C

at Connector:                -40°C – 160°C

Type SCS24XXBB3

at Sensor:                    -40°C – 275°C

at Connector:                -40°C – 160°C

### Dimensions:

sensing head: Ø 4.00 mm x L 15.00 mm

cable length: on request

### Material:

Stainless Steel, Ceramic, Kapton

### Protection Class:

IP 64

### Assembly:

on request





The SAW Cable Sensor is a small SAW sensor with a separated antenna. This allows the temperature measurement in conditions, where the sensor and the antenna have to be separated.

### Features and Applications:

- applications with separated measurement point and antenna mount
- use in vacuum

## Wireless Temperature Spit

 200 °C  
 275 °C  
**ISM 2.4**

### Order Number:

Type 200°C with connector: WTSB24xxBB2RSF  
 Type 275°C with connector: WTSB24xxBB3RSF  
 Type 275°C with slot antenna: WTSC24xxBB3ASTSW05

**Sensor Type:** Resonator  
**Frequency Band:** 2400 – 2483 MHz (ISM)  
**Antenna:** R-SMA connector

### Operating Temp.:

Type WTSB24XXBB2  
 at Sensor: -40°C – 200°C  
 at Connector: -40°C – 160°C

Type WTSB24XXBB3  
 at Sensor: -40°C – 275°C  
 at Connector: -40°C – 160°C

Type WTSC24XXBB3: -40°C – 275°C

**Dimensions:** sensing head: 165 mm x 15 mm /  
 Ø 4.00 mm (tip)  
 sensor length: on request

**Material:** V2A: ALSI 304 / 1.4301

**Protection Class:** IP 67

### Assembly:

Type WTS B Use WTS-E1 and WTS-AM1  
 Type WTS C Threat G¼ 20.30mm (length)

### Customization Options:

- spit length on request
- 1-axis pliable
- fixed antenna APTSW01 5 dBi (WTS C)



WTS C

WTS B

The Wireless Temperature Spit is screwed into the M10 connection flange (WTS-E1) and can be removed from a tube without pressure shutdown. The Wireless Temperature Spit can be customized to applications.

**Features and Applications:**

- temperature measurement in tubes with fitting
- wireless sensing head
- use miscellaneous antennas

**Accessories:**

**WTS-AM1**

**Function:** solder fitting, access to tube, screw in WTS-E1

**Dimensions:** Ø 17 mm x H 18 mm

**Material:** brass

**Weight:** 20 g

**Assembly:** hard-soldering on tube flat  
drill 6 mm hole



WTS-E1

**WTS-E1**

**Function:** metering point, screw in WTS-AM1  
holds Wireless Tube Spit

**Dimensions:** W 19 mm x H 52 mm

**Material:** stainless steel 1.4571  
clamp collar: peek

**Weight:** 52 g

**Pressure:** 40 bar

**Buckling load:** max. 5kg

**Assembly:** screw in WTS-AM1  
wrench size: 19



WTS-AM1

## Universal Temperature Sensor Module

 °C  
 200  
 ISM  
 2.4

<b>Order Number:</b>	SM24xxBB20SF
<b>Sensor Type:</b>	Resonator
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna:</b>	SMA
<b>Operating Temp.:</b>	
at Sensor:	-40°C – 200°C
at Connector:	-40°C – 160°C
<b>Dimensions:</b>	∅ 25 mm x H 19.50 mm
<b>Material:</b>	Stainless Steel
<b>Protection Class:</b>	IP 67
<b>Assembly:</b>	Screwing (M3) hole distance: 16mm Welding, Gluing Mounting on Clamp



The Universal Sensor Module is a small SAW sensor for the use in all kind of application, including switch gears, tubes (with additional clamp ring) or tools. Equipped with a robust SMA connector it can be equipped with different types of 2.4 GHz antennas, to provide optimal reading signals for each application.

### Features and Applications:

- use miscellaneous antenna
- for switch gears

## Nail Sensor

 °C  
**200**  
**ISM**  
**2.4**

<b>Order Number:</b>	SNS24xxBB2APTPL
<b>Sensor Type:</b>	Resonator
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna:</b>	Patch
<b>Operating Temp.:</b>	
at Sensor:	-40°C – 200°C
at Antenna:	-40°C – 165°C
<b>Dimensions:</b>	
Antenna:	18x18x4mm
Sensor:	∅ 4 mm x L 35 mm (length customizable)
<b>Material:</b>	Stainless Steel, Ceramic
<b>Protection Class:</b>	IP 64
<b>Assembly:</b>	fix in 4mm hole (i.e. glueing)



The Nail Sensor is the newest member of small SAW temperature sensors with integrated antennas for monitoring temperature inside of tools, batteries and all kinds objects. The module is fully encapsulated for the use in dirty and harsh environments. The small antenna allows a reading distance of about 50cm with standard antennas.

### Features and Applications:

- small size
- fully encapsulated



## Flexible Temperature Sensor

°C  
200  
ISM  
2.4

**Order Number:** SFS24XXBB2APTAB01  
**Sensor Type:** Resonator  
**Frequency Band:** 2400 – 2483 MHz (ISM)  
**Antenna:** Patch

**Operating Temp.:**  
at Sensor: -40°C – 200°C  
at Antenna: -40°C – 165°C


**Dimensions:**  
Antenna: 18x18x4mm  
Sensor: 3x3x2mm  
*(length customizable)*

**Material:** flexible PCB  
**Protection Class:** IP40

**Assembly:** on demand



*(Flexible Sensor embedded by additive manufacturing)*

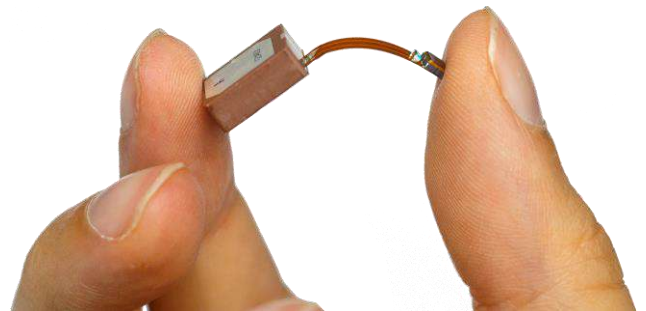

The Flexible Sensor is perfectly suited for the integration of the temperature sensor even in the narrowest space and crooked corners. The flexible connection between sensor and antenna can bend around corners and be used also with additive manufacturing processes of printed parts. The small but powerful patch antenna allows great signal quality in machines for rotating and moving parts.

### Features and Applications:

- small sensor size
- flexible bending of the connecting line

## M4 Miniature Temperature Sensor Screw

 °C  
**200**  
**ISM**  
**2.4**

<b>Order Number:</b>	SSS0424xxBO2AMPSW01
<b>Sensor Type:</b>	Resonator
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	0 dBi
<b>Operating Temp.:</b>	-40°C – 200°C
<b>Dimensions:</b>	sensing head: M4 screw x H 10 mm antenna: 36mm (dep. on range) wrench size: 7 mm
<b>Material:</b>	Stainless Steel, Brass
<b>Protection Class:</b>	IP 67
<b>Assembly:</b>	Screwing (M4), wrench size: 7 mm



The M4 Miniature Sensor Screw is the smallest SAW temperature sensor ever created. Its special low weight construction is especially suitable for applications on vibrating parts, e.g. fuel pumps.

### Features and Applications:

- short range temperature monitoring
- vibrating objects (engines, ...)

## Short Range Temperature Sensor for Rotating Applications

 °C  
**200**  
**ISM**  
**2.4**

### Order Number:

Type AB3\*            SES2xxxAB3ASLSW02  
 Type BB3             SES2xxxBB3ASLSW02

**Sensor Type:**        Resonator  
**Frequency Band:**    2400 – 2483 MHz (ISM)  
**Antenna Gain:**        -3 dBi

**Operating Temp.:**  
 Type SES2XXXAB3\*    0°C – 275°C  
 Type SES24XXBB3     -40°C – 275°C

**Dimensions:**        Ø 25mm  
**Material:**             Stainless Steel, Rogers  
**Protection:**         IP 67  
**Assembly:**            Screwing (M2), Cavity



\*) diff. temperature coefficient of frequency (TCF)

The Short Range Temperature Sensor Module is a special temperature sensor for applications which require a flush construction, with no supernatant. The sensor can be let-in flush into any surface, even in metal surfaces. The construction allows operation under extreme G-forces up to 16'000 g.

### Features and Applications:

- maximum centrifugal force: 16'000 g
- short range temperature monitoring
- zero construction height
- use on rotating objects
- engines, turbines, sealings

# Antennas

## Universal Antenna 8 dBi

 °C  
**85**  
**ISM**  
**2.4**

<b>Order Number:</b>	AFPHS01LCP080850SM
<b>Antenna Type:</b>	Sencity Antenna
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	8.5 dBi
<b>3dB Beam Angle:</b>	70°
<b>Polarity:</b>	left circular
<b>Operating Temp.:</b>	-40°C - +85°C
<b>Dimensions:</b>	95 mm x 101 mm x 32 mm
<b>Material:</b>	ASA
<b>Protection:</b>	IP 54
<b>Connector:</b>	SMA
<b>Assembly:</b>	screwing, mounting plate



The universal 8 dBi antenna is the standard 2.4 GHz reading antenna for many applications that have no increased requirements in environmental conditions or reading distance, e.g. production logistics or assembly lines. The 8 dBi gain provides a reading distance of 1-3 meters with many types of SAW IDENT transponders and SAW Sensors (depending on transponder/sensor antenna).

### Features and Applications:

- best price-performance ratio
- easy to handle
- for medium range reading
- RFID stations

## Universal Antenna 5 dBi

<b>Order Number:</b>	APTSW020LP050850SF
<b>Antenna Type:</b>	Patch
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	5 dBi
<b>3dB Beam Angle:</b>	???
<b>Polarity:</b>	linear
<b>Operating Temp.:</b>	-40°C - +85°C
<b>Dimensions:</b>	80 mm x 80 mm x 9 mm
<b>Material:</b>	???
<b>Protection:</b>	IP 67
<b>Connector:</b>	SMA
<b>Assembly:</b>	screwing, mounting plate

The universal 5 dBi antenna is the standard 2.4 GHz reading antenna for many applications. It is fully encapsulated to operate also in dirty environments. With its 5 dBi gain and open arc it provides a reading distance of 1-2 meters and is easy in handling with many types of SAW IDENT transponders and SAW Sensors (depending on transponder/sensor antenna).

### Features and Applications:

- best price-performance ratio
- easy to handle
- for medium range reading
- for dirty environments



## Universal Antenna 16 / 20 dBi

°C  
85

ISM  
2.4

AFPSC 16 dBi  
AFPSC 20 dBi

### Order Number:

Type 16 dBi: AFPSC010LP160850NF  
Type 20 dBi: AFPSC010LP200850NF

**Antenna Type:** Flat Panel Antenna  
**Frequency Band:** 2400 – 2483 MHz (ISM)  
**Antenna Gain:** 16 dBi / 20 dBi  
**3 dB Beam Angle:** 28° / ??  
**Polarity:** linear

**Operating Temp.:** -40°C - +85°C

**Dimensions:**  
Type 16 dBi: 205 mm x 205 mm x 45 mm  
Type 20 dBi: 350 mm x 350 mm x 30 mm

**Material:** PVC, Aluminium  
**Protection:** IP 54

**Connector:** N, female  
**Assembly:** screwing, mounting plate

The universal 16 dBi antenna is a standard 2.4 GHz reading antenna for applications that have no increased requirements in environmental conditions but require a high reading distance. The 16 dBi gain provides a reading distance of 5-8 meters with many types of SAW IDENT transponders and SAW Sensors.

### Features and Applications:

- cost efficient
- for high range reading



## High Temperature Slot Antenna


  
 275 °C    350 °C

ASTSW02 8 dBi  
 ASTSW03 10 dBi

ISM  
 2.4

### Order Number:

Type 8 dBi            ASTSW080LP082600NF  
 Type 10 dBi         ASTSW030LP102600NF

**Antenna Type:**        Slot Antenna  
**Frequency Band:**    2400 – 2483 MHz (ISM)  
**Antenna Gain:**        8 dBi / 10 dBi  
**Polarity:**              linear

**Operating Temp.:**    -40°C - +260°C  
                                   (optional 350°C)

**Dimensions:**  
 Type 8 dBi            130 mm x 40 mm x 30 mm  
 Type 10 dBi         165 mm x 165 mm x 30 mm

**Material:**              stainless steel  
                                   Kapton (optional also  
                                   stainless steel)

**Protection:**         IP 67

**Connector:**            N, female  
**Assembly:**            screwing (M5)



The High Temperature Slot Antenna is the standard reading antenna for all applications that have harsh environmental conditions, like temperatures up to 260°C or even 350°C. It provides enhanced reading distance for many applications, e.g. production ovens and heaters. The 350°C-version can be used in high vacuum conditions.

### Features and Applications:

- for high temperature environments
- steel industry, production ovens, heaters, vacuum chambers.



# High Temperature Horn Antenna

 °C  
**275**
 °C  
**350**

**ISM**  
**2.4**

AHOSW01 17 dBi

<b>Order Number:</b>	AHOSW010LP172750NF
<b>Antenna Type:</b>	Horn Antenna
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	17 dBi
<b>Polarity:</b>	linear
<b>Operating Temp.:</b>	-40°C - +275°C (optional 350°C)
<b>Dimensions:</b>	305 mm x 305 mm x 320 mm
<b>Material:</b>	stainless steel (V2A)
<b>Protection:</b>	IP 67
<b>Connector:</b>	N, female
<b>Assembly:</b>	screwing (M5)



The High Temperature Horn Antenna is a special high-range antenna for very harsh environments. It is especially built to work in conditions with a high level of dust or dirt and temperature. It combines a robust design with a very high antenna gain of 17 dBi for high reading distances up to 10 meters with many types of SAW sensors and SAW transponders.

### Features and Applications:

- for high temperature environments
- for harsh conditions like dirt, spray water
- steel industry, production ovens, heaters; also vacuum chambers

## Strip Line Antenna

### Ring / Ring Segment Strip Line Antenna

°C 275 °C 350

°C 200 ISM 2.4

<b>Order Number:</b>	on request
<b>Antenna Type:</b>	Strip Line Antenna
<b>Frequency Band:</b>	2400 – 2483 MHz (ISM)
<b>Antenna Gain:</b>	0 dBi
<b>Polarity:</b>	linear
<b>Operating Temp.:</b>	depending on application
<b>Dimensions:</b>	depending on application
<b>Material:</b>	depending on application
<b>Protection:</b>	depending on application
<b>Connector:</b>	SMA / N
<b>Assembly:</b>	depending on application

The Strip Line Antenna is available for rotating applications like shafts and axles run at high rotating speeds. The antenna is customized to the requirements of the application like diameter, available building space and temperature.

#### Features and Applications:

- diameter customized for application
- different temperature ranges available
- for rotating objects like shafts, axles, etc.
- can be run at all rotation speeds (> 0 rpm)



Full ring



Ring Segment



## Antenna Accessories

### Antenna Cables and Connectors

All antennas can be equipped with different types of cables. Cables will be made up with the connectors in the desired length.

Cable	Tmax [°C]	Cover Material	Ø [mm]	Bending-Rad. [mm]	Flexible	Connector		Attenuation [dB / m]
						SMA	N	
ARCL7	85	PVC	7.30	25.00	•		•	0.3
RG142	165	FEP	4.95	30.00 (static)	•	•	•	0.8
KPTN1	260	Kapton	2.40	18.00	•	•	•	4.0
TCX01	600	Stainless Steel	3.00	9.00		•	•	2.6



ARCL7



KPTN1



RG142



TCX01



# Sensor Elements

## Overview: Sensor Elements

SAW COMPONENTS provides a broad range of SAW Sensor Elements. Choose the element which meets the needs of your application.

1. Choose from 3 temperature ranges:


<b>Type:</b>	<b>Tmax:</b>
<b>FB2</b>	200°C
<b>FB3</b>	275°C
<b>FB4</b>	350°C

2. Choose from 2 licence free ISM bands:

<b>ISM 433</b>	ISM Band 433 MHz 433.05 MHz – 434.79 MHz
<b>ISM 2.4</b>	ISM Band 2.4 GHz 2400 MHz – 2483 MHz

3. Choose package:

<b>Type</b>	<b>Package:</b>
<b>FB</b>	SMD 3x3mm <sup>2</sup> ceramic
<b>FO</b>	TO25 2.5mm metal
<b>FM</b>	TO39 10mm metal

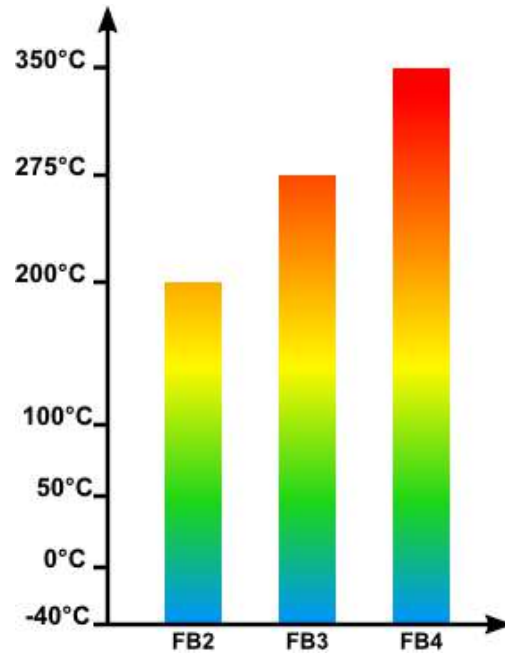

**FB**



**FO**



**FM**

Type	Band	Temperature R.	Package	Number of FQ
SS43xFB2	ISM 433 MHz	-40°C – 200°C	SMD 3x3 mm <sup>2</sup>	4
SS43xFB3	ISM 433 MHz	-40°C – 275°C	SMD 3x3 mm <sup>2</sup>	4
SS43xFB4	ISM 433 MHz	-40°C – 350°C	SMD 3x3 mm <sup>2</sup>	4
SS43xFO2	ISM 433 MHz	-40°C – 200°C	TO25 2.5mm	3
SS43xFO4	ISM 433 MHz	-40°C – 350°C	TO25 2.5mm	3
SS24xxBB2	ISM 2.4 GHz	-40°C – 200°C	SMD 3x3 mm <sup>2</sup>	13
SS24xxBB3	ISM 2.4 GHz	-40°C – 275°C	SMD 3x3 mm <sup>2</sup>	10
SS24xxBO3	ISM 2.4 GHz	-40°C – 200°C	TO25 2.5mm	19

## SS43xFB2

433 MHz - SAW Sensor for 200°C

SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.


200 °C  
ISM  
433

**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 200°C

Order Number	nominal Frequency	Tolerance
SS433FB2	433.560 MHz	± 15 kHz
SS434FB2	434.350 MHz	± 15 kHz
SS435FB2	435.740 MHz	± 15 kHz
SS436FB2	437.030 MHz	± 15 kHz



**Sensitivity:** 15 kHz / K  
**Aging (Tmax):** 0.3 K / 1000 h @ 200°C  
**Package:** SMD 3x3mm<sup>2</sup>

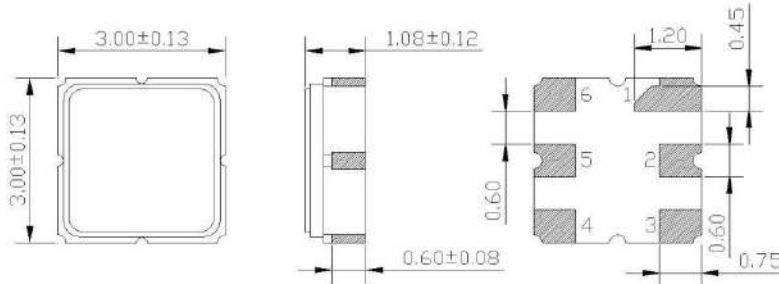

All dimensions in mm

Pin 1	Case ground	Pin 6	to be grounded
Pin 2	Antenna (Input / Output)	Pin 5	to be grounded
Pin 3	to be grounded	Pin 4	Case ground

Pin 1	Case ground
Pin 2	Input/Output (Antenna +)
Pin 3	Not connected
Pin 6	Not connected
Pin 5	Input/Output (Antenna -)
Pin 4	Case ground

### Features and Applications:

- temperature measurement probes
- food industry
- environments without line-of-sight between antennas

**ISM 433** **Important Note:** SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

## SS43xFB3

433 MHz - SAW Sensor for 275°C

SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

°C  
275  
ISM  
433



**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 275°C

Order Number	nominal Frequency	Tolerance
SS433FB3	433.560 MHz	± 15 kHz
SS434FB3	434.350 MHz	± 15 kHz
SS435FB3	435.740 MHz	± 15 kHz
SS436FB3	437.030 MHz	± 15 kHz

**Sensitivity:** 15 kHz / K  
**Aging (Tmax):** -0.3 K / 1000 h @ 275°C  
**Package:** SMD 3x3mm<sup>2</sup>



(Image may differ from original product)

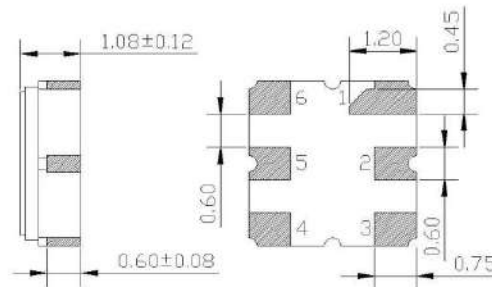

All dimensions in mm

Pin 1	Case ground
Pin 2	Input/Output (Antenna +)
Pin 3	Not connected
Pin 6	Not connected
Pin 5	Input/Output (Antenna -)
Pin 4	Case ground

### Features and Applications:

- temperature measurement probes
- food industry
- environments without line-of-sight between antennas

**ISM 433** **Important Note:** SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

## SS43xFB4

433 MHz - SAW Sensor for 350°C

SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

°C  
350  
ISM  
433



**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 350°C

Order Number	nominal Frequency	Tolerance
SS433FB4	433.560 MHz	± 15 kHz
SS434FB4	434.350 MHz	± 15 kHz
SS435FB4	435.740 MHz	± 15 kHz
SS436FB4	437.030 MHz	± 15 kHz

**Sensitivity:** 15 kHz / K  
**Aging (Tmax):** -0.3 K / 1000 h @ 350°C  
**Package:** SMD 3x3mm<sup>2</sup>



(Image may differ from original product)

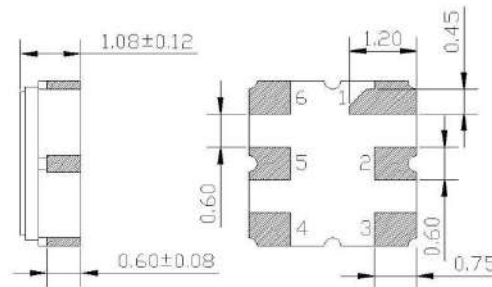

All dimensions in mm

Pin 1	Case ground
Pin 2	Input/Output (Antenna +)
Pin 3	Not connected
Pin 6	Not connected
Pin 5	Input/Output (Antenna -)
Pin 4	Case ground

### Features and Applications:

- temperature measurement probes
- process monitoring
- environments without line-of-sight between antennas

**ISM 433** **Important Note:** SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.



## SS43xFO2

The smallest 433 MHz - SAW Sensor for 200°C

SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.



**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 200°C



Order Number	nominal Frequency	Tolerance
SS434FO2	434.290 MHz	± 15 kHz
SS435FO2	435.265 MHz	± 15 kHz
SS436FO2	436.580 MHz	± 15 kHz

**Sensitivity:** 15 kHz / K  
**Aging (Tmax):** -0.8 K / 1000 h @ 200°C  
**Package** TO25 2.5mm metal package



### Features and Applications:

- temperature measurement probes
- food probes
- PT100 replacement
- environments without line-of-sight between antennas

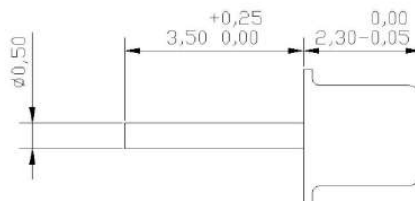

All dimensions in mm

Pin 1 Antenna (Input / Output)  
 Cap to be grounded

**ISM  
433**

**Important Note:** SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

## SS43xFO4

The smallest 433 MHz - SAW Sensor for 350°C

SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

°C  
350  
ISM  
433

**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 350°C



Order Number	nominal Frequency	Tolerance
SS434FO4	434.280 MHz	± 15 kHz
SS435FO4	435.285 MHz	± 15 kHz
SS436FO4	436.610 MHz	± 15 kHz

**Sensitivity:** 15 kHz / K  
**Aging (Tmax):** +2.0 K / 1000 h @ 350°C  
**Package** TO25 2.5mm metal package



### Features and Applications:

- temperature measurement probes
- food probes
- process monitoring
- PT1000 replacement
- environments without line-of-sight between antennas

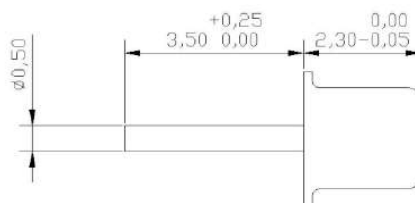

All dimensions in mm

Pin 1 Antenna (Input / Output)  
Cap to be grounded



**ISM  
433**

**Important Note:** SAW Sensor for the ISM 433 MHz-Band do **NOT** operate with the ISM 2.4 GHz-Band system components in this catalogue.

# SS24xxBB2

2.45 GHz - SAW Sensor for 200°C



**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 200°C

Order Number	nominal Frequency	Tolerance
SS2414BB2	2415.770 MHz	+/- 700 KHz
SS2417BB2	2417.820 MHz	+/- 700 KHz
SS2422BB2	2423.000 MHz	+/- 700 KHz
SS2429BB2	2430.230 MHz	+/- 700 KHz
SS2432BB2	2432.350 MHz	+/- 700 KHz
SS2437BB2	2437.470 MHz	+/- 700 KHz
SS2444BB2	2444.710 MHz	+/- 700 KHz
SS2447BB2	2446.860 MHz	+/- 700 KHz
SS2452BB2	2451.960 MHz	+/- 700 KHz
SS2459BB2	2459.220 MHz	+/- 700 KHz
SS2467BB2	2466.490 MHz	+/- 700 KHz
SS2474BB2	2473.770 MHz	+/- 700 KHz
SS2482BB2	2481.900 MHz	+/- 700 KHz


**Q-Factor:** 8750  
**Sensitivity:** 66 kHz / K  
**Aging (Tmax):** -0.5 K / 1000 h @ 200°C  
**Package** SMD 3x3mm<sup>2</sup>



(Image may differ from original product)

**Features and Applications:**

- temperature measurement probes
- process monitoring
- metallic environments (chambers)

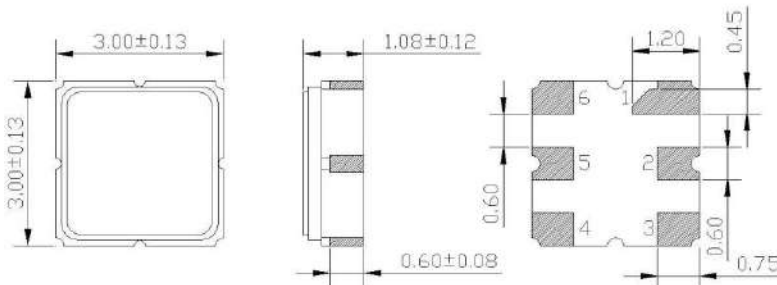

All dimensions in mm

- Pin 1 Case ground
- Pin 2 Input/Output (Antenna +)
- Pin 3 Not connected
- Pin 6 Not connected
- Pin 5 Input/Output (Antenna -)
- Pin 4 Case ground

# SS24xxBB3

2.45 GHz - SAW Sensor for 275°C



**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 275°C

Order Number	nominal Frequency	Tolerance
SS2414BB3	2412.700 MHz	+/- 700 KHz
SS2422BB3	2420.500 MHz	+/- 700 KHz
SS2429BB3	2427.800 MHz	+/- 700 KHz
SS2437BB3	2435.000 MHz	+/- 700 KHz
SS2444BB3	2442.000 MHz	+/- 700 KHz
SS2452BB3	2449.400 MHz	+/- 700 KHz
SS2459BB3	2456.100 MHz	+/- 700 KHz
SS2467BB3	2463.500 MHz	+/- 700 KHz
SS2474BB3	2470.900 MHz	+/- 700 KHz
SS2482BB3	2478.000 MHz	+/- 700 KHz



**Q-Factor:** 6800  
**Sensitivity:** 66 kHz / K @ 23°C (non-linear)  
**Aging (Tmax):** +1.2 K / 1000 h @ 275°C  
**Package:** SMD 3x3mm<sup>2</sup>



(Image may differ from original product)

### Features and Applications:

- temperature measurement probes
- process monitoring
- metallic environments (chambers)

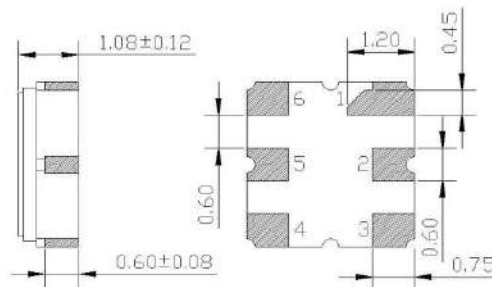

All dimensions in mm

- Pin 1 Case ground
- Pin 2 Input/Output (Antenna +)
- Pin 3 Not connected
- Pin 6 Not connected
- Pin 5 Input/Output (Antenna -)
- Pin 4 Case ground

# SS24xxBO2

2.45 GHz - SAW Sensor for 200°C



**Sensor Type:** Resonator  
**Operating Temp.:** -40°C – 200°C



Order Number	nominal Frequency	Tolerance
SS2413BO2	2413.000 MHz	+/- 1000 KHz
SS2420BO2	2422.000 MHz	+/- 1000 KHz
SS2427BO2	2427.400 MHz	+/- 1000 KHz
SS2435BO2	2434.600 MHz	+/- 1000 KHz
SS2442BO2	2442.000 MHz	+/- 1000 KHz
SS2449BO2	2449.000 MHz	+/- 1000 KHz
SS2456BO2	2456.000 MHz	+/- 1000 KHz
SS2463BO2	2463.000 MHz	+/- 1000 KHz
SS2471BO2	2471.000 MHz	+/- 1000 KHz
SS2478BO2	2478.000 MHz	+/- 1000 KHz

**Q-Factor:**  
**Sensitivity:** 66 kHz / K @ 23°C  
**Aging (Tmax):**  
**Package** TO25 2.5mm metal package



**Features and Applications:**

- temperature measurement probes
- very thin probes (3 mm spits possible)

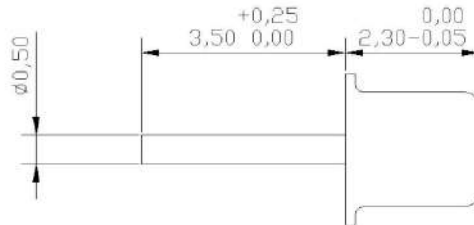

All dimensions in mm

Pin 1 Cap      Antenna (Input / Output) to be grounded